WORKTOP REFRIGERATOR

Model: SW60N

Natural Refrigerant R-290 Model

60" Worktop Refrigerator with Solid Doors



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



Continental

Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Expansion valve system | |
|----------------------------------|---|--|
| Stainless steel back | Adjustable legs | |
| Overshelves (single or double) | Door locks | |
| Add'l epoxy-coated steel shelves | Special electrical requirements (consult factory) | |
| Stainless steel shelves | | |

Consult factory for other model configurations, options and accessories.

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system Natural, environmentally-safe,

high-efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
Completely enclosed, vented and removable case back

MODEL FEATURES

5" casters

Electronic controller w/digital display & hi-low alarm Field rehingeable doors

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|------------------|
| Net Capacity (cu. ft.) | 17.0 (481 cu l) |
| Width, Overall (in.) | 60 (1524 mm) |
| Depth, Overall (in.) (incl. handles & bumpers) | 32 3/16 (818 mm) |
| Height, Overall (in.) (incl. 5" casters) | 35 1/4 (895 mm) |
| Shelf Area (sq. ft.) | 8.1 (.8 sq m) |
| No. of Shelves | 2 |
| No. of Doors | 2 |
| Interior Depth (in.) | See Drawing |
| Interior Height (in.) | 26 1/4 (667 mm) |
| Interior Width (in.) | 56 (1422 mm) |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/5 | |
|-----------------------------|------|--|
| Capacity (BTU/Hr)* | 1625 | |

ELECTRICAL DATA

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Total Amps (int'l) | 2.46 (1.85) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| Weight (lbs.) | 284 (129 kg) |
|-----------------------|------------------|
| Height - Crated (in.) | 43 1/4 (1099 mm) |
| Width - Crated (in.) | 68 (1727 mm) |
| Depth - Crated (in.) | 37 1/4 (946 mm) |

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

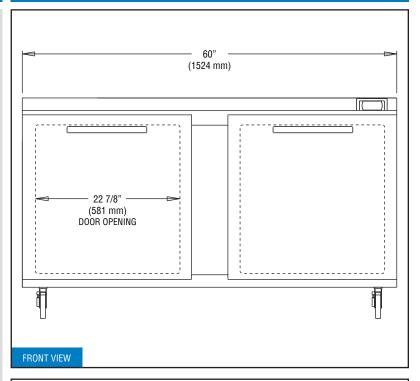

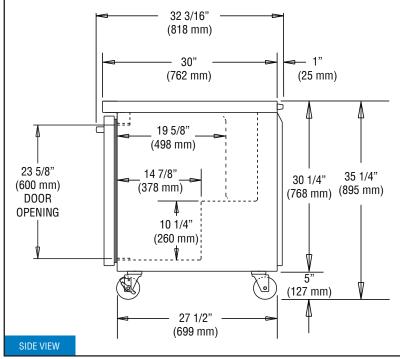

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>